JCB ENERGY ELECTRIC POWER INDUSTRY

MADRID / SPAIN

-VERTA-106188
-VERTA-106189

www.jcbenergy.com

ДИЗЕЛЬ-ГЕНЕРАТОР- СЕРІЯ JCN

ГРУПА		JCN 11	JCN 16	JCN 18	JCN 23
Stand By-Резервна потужність	kVA (kWe) A	11,0 [8,8] 15,9	16,0 [12,8] 23,1	18,0 [14,4] 26,0	23,0 [18,4] 33,2
Prime-Основна потужність	kVA (kWe) A	10,0 [8,0] 14,5	14,5 [11,6] 21,0	16,4 [13,1] 23,6	20,9 [16,7] 30,2
Стабільна потужність	kVA (kWe) A	7,0 [5,6] 10,1	10,2 [8,1] 21,0	11,5 [9,2] 16,6	14,6 [11,7] 21,2
Фактори сили	CosQ	0,8	0,8	0,8	0,8
Частота	Hz	50	50	50	50
ДВИГУН					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Модель		E13C	E20C	E22C	E28C
Швидкість	(Д/хв.)	1500	1500	1500	1500
Загальна потужність двигуна	(kW)	13,0	17,5	18,5	23,5
Чиста потужність двигуна	(kW)	11,0	15,5	16,5	21,5
Кількість циліндрів		4	4	4	4
Конфігурація		Вертикальний горизонтальний	Вертикальний горизонтальний	Вертикальний горизонтальний	Вертикальний горизонтальний
Клас викидів		Tier II	Tier II	Tier II	Tier II
Аспірація		Природний	Природний	Природний	Природний
Тип регулятора		Механічний	Механічний	Механічний	Механічний
Об'єм циліндра	[L]	2,27	2,27	2,27	2,27
Bore ve Stroke	[mm]	85 x 100	85 x 100	85 x 100	85 x 100
Коефіцієнт стиснення		19.1:1	19.1:1	19.1:1	19.1:1
Електрична система	[V]	12	12	12	12
Економія палива - Prime 50% навантаження	[я/год] [1500 об/хв]	1,50	2,07	2,63	2,82
Економія палива - Prime 75% навантаження	[я/год] [1500 об/хв]	2,10	2,90	3,06	4,07
Економія палива - Prime 100% навантаження	[я/год] [1500 об/хв]	2,73	3,77	3,99	5,33
Режим очікування - Standby при навантаженні 110%	[я/год] [1500 об/хв]	3,08	4,15	4,39	5,85
Місткість паливного бака, Без кабіни [З кабіною]	[L]	58 [100]	58 [100]	58 [100]	58 [100]
АЛЬТЕРНАТОР					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Вихідна потужність	kVA	10,0	15,0	16,0	21,0
Надмірна кількість обертів за хвилину	д/хв	2250	2250	2250	2250
Клас ізоляції		H	H	H	H
Клас захисту		IP-23	IP-23	IP-23	IP-23
Напруга		231 / 400 V	231 / 400 V	231 / 400 V	231 / 400 V
Регулювання напруги		±1	±1	±1	±1
РОЗМІРИ					
Ширина - з кабіною [без кабіни]	[mm]	597 [1000]	597 [1000]	597 [1000]	597 [1000]
Довжина - з кабіною [без кабіни]	[mm]	1400 [2000]	1400 [2000]	1400 [2000]	1400 [2000]
Висота - з кабіною [без кабіни]	[mm]	1309 [1190]	1309 [1190]	1309 [1190]	1309 [1190]
Вага - з кабіною [без кабіни]	[kg]	522 [650]	525 [660]	531 [670]	537 [680]

CE -VERTA-106188
-VERTA-106189

JCB ENERGY ЗАЛИШАЄ ПРАВО ЗМІНЯТИ КАТАЛОГИ, ПРОДУКЦІЮ, МОДЕЛІ І СПЕЦИФІКАЦІЇ.

ГРУПА		JCN 26	JCN 30	JCN 34	JCN 38
Stand By-Резервна потужність	kVA (kWe) A	26,0 [20,8] 37,6	30,0 [24,0] 43,4	34,0 [27,2] 49,1	38,0 [30,4] 54,9
Prime-Основна потужність	kVA (kWe) A	23,6 [18,9] 34,2	27,3 [21,8] 39,4	30,9 [24,7] 44,7	34,5 [27,6] 49,9
Стабільна потужність	kVA (kWe) A	16,5 [13,2] 23,9	19,1 [15,3] 27,6	21,6 [17,3] 31,3	24,2 [19,3] 34,9
Фактори сили	CosQ	0,8	0,8	0,8	0,8
Частота	Hz	50	50	50	50
ДВИГУН					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Модель		E32C	E37C	E42C	E49JC
Швидкість	(Д/хв.)	1500	1500	1500	1500
Загальна потужність двигуна	(kW)	26,0	30,0	34,0	38,0
Чиста потужність двигуна	(kW)	24,0	28,0	32,0	36,0
Кількість циліндрів		4	4	4	4
Конфігурація		Вертикальний горизонтальний	Вертикальний горизонтальний	Вертикальний горизонтальний	Вертикальний горизонтальний
Клас викидів		Tier II	Tier II	Tier II	Tier II
Аспірація		Природний	Природний	Природний	Природний
Тип регулятора		Механічний	Механічний	Механічний	Механічний
Об'єм циліндра	[L]	2,77	2,77	2,77	2,55
Bore ve Stroke	[mm]	93 x 102	93 x 102	93 x 102	90 x 100
Коефіцієнт стиснення		19.1:1	19.1:1	19.1:1	19.1:1
Електрична система	[V]	12	12	12	12
Економія палива - Prime 50% навантаження	[я/год] [1500 об/хв]	3,3	3,56	4,09	4,49
Економія палива - Prime 75% навантаження	[я/год] [1500 об/хв]	4,9	4,98	5,89	6,29
Економія палива - Prime 100% навантаження	[я/год] [1500 об/хв]	6,4	6,48	7,71	8,18
Режим очікування - Standby при навантаженні 110%	[я/год] [1500 об/хв]	7,0	7,12	8,46	9,01
Місткість паливного бака, Без кабіни [З кабіною]	[L]	58 [100]	58 [100]	58 [100]	58 [100]
АЛЬТЕРНАТОР					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Вихідна потужність	kVA	24,0	27,0	31,0	35,0
Надмірна кількість обертів за хвилину	д/хв	2250	2250	2250	2250
Клас ізоляції		H	H	H	H
Клас захисту		IP-23	IP-23	IP-23	IP-23
Напруга		231 / 400 V	231 / 400 V	231 / 400 V	231 / 400 V
Регулювання напруги		±1	±1	±1	±1
РОЗМІРИ					
Ширина - з кабіною [без кабіни]	[mm]	597 [1000]	619 [1000]	619 [1000]	619 [1000]
Довжина - з кабіною [без кабіни]	[mm]	1400 [2000]	1400 [2000]	1400 [2300]	1400 [2300]
Висота - з кабіною [без кабіни]	[mm]	1309 [1190]	1329 [1190]	1329 [1190]	1329 [1190]
Вага - з кабіною [без кабіни]	[kg]	553 [690]	557 [710]	577 [730]	585 [740]

CE -VERTA-106188
-VERTA-106189

JCB ENERGY ЗАЛИШАЄ ПРАВО ЗМІНЯТИ КАТАЛОГИ, ПРОДУКЦІЮ, МОДЕЛІ І СПЕЦИФІКАЦІЇ.

ДИЗЕЛЬ-ГЕНЕРАТОР- СЕРІЯ JCN

ГРУПА		JCN 44	JCN 51	JCN 55	JCN 60
Stand By-Резервна потужність	kVA (kWe) A	44,0 [35,2] 63,6	51,0 [40,8] 73,7	55,0 [44,0] 79,5	60,0 [48,0] 86,7
Prime-Основна потужність	kVA (kWe) A	40,0 [32,0] 57,8	46,4 [37,1] 67,0	50,0 [40,0] 72,3	54,5 [43,6] 78,8
Стабільна потужність	kVA (kWe) A	28,0 [22,4] 40,5	32,5 [26,0] 46,9	35,0 [28,0] 50,6	38,2 [30,5] 55,2
Фактори сили	CosQ	0,8	0,8	0,8	0,8
Частота	Hz	50	50	50	50
ДВИГУН					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Модель		E54JC	E63JC	E68JC	E74JC
Швидкість	(Д/хв.)	1500	1500	1500	1500
Загальна потужність двигуна	(kW)	44,0	50,0	53,0	58,0
Чиста потужність двигуна	(kW)	41,0	46,0	49,0	54,0
Кількість циліндрів		4	4	4	4
Конфігурація		Вертикальний горизонтальний	Вертикальний горизонтальний	Вертикальний горизонтальний	Вертикальний горизонтальний
Клас викидів		Tier II	Tier II	Tier II	Tier II
Аспірація		З турбонаддувом	З турбонаддувом	З турбонаддувом	З турбонаддувом
Тип регулятора		Механічний	Механічний	Механічний	Механічний
Об'єм циліндра	[L]	2,55	2,55	2,55	3,76
Bore ve Stroke	[mm]	90 x 100	90 x 100	90 x 100	102 x 115
Коефіцієнт стиснення		19.1:1	19.1:1	19.1:1	17.5:1
Електрична система	[V]	12	12	12	12
Економія палива - Prime 50% навантаження	[я/год] [1500 об/хв]	5,21	5,93	6,36	6,90
Економія палива - Prime 75% навантаження	[я/год] [1500 об/хв]	7,29	8,29	9,16	9,66
Економія палива - Prime 100% навантаження	[я/год] [1500 об/хв]	9,49	10,79	11,99	12,39
Режим очікування - Standby при навантаженні 110%	[я/год] [1500 об/хв]	10,44	11,86	13,19	13,56
Місткість паливного бака, Без кабіни [З кабіною]	[L]	55 [100]	55 [100]	55 [100]	134 [100]
АЛЬТЕРНАТОР					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Вихідна потужність	kVA	40,0	46,0	50,0	55,0
Надмірна кількість обертів за хвилину	д/хв	2250	2250	2250	2250
Клас ізоляції		H	H	H	H
Клас захисту		IP-23	IP-23	IP-23	IP-23
Напруга		231 / 400 V	231 / 400 V	231 / 400 V	231 / 400 V
Регулювання напруги		±1	±1	±1	±1
РОЗМІРИ					
Ширина - з кабіною [без кабіни]	[mm]	622 [1000]	622 [1000]	622 [1000]	700 [1000]
Довжина - з кабіною [без кабіни]	[mm]	1600 [2300]	1600 [2300]	1600 [2300]	1700 [2700]
Висота - з кабіною [без кабіни]	[mm]	1329 [1190]	1329 [1190]	1329 [1190]	1562 [1190]
Вага - з кабіною [без кабіни]	[kg]	657 [830]	685 [850]	701 [870]	857 [990]

CE -VERTA-106188
-VERTA-106189

JCB ENERGY ЗАЛИШАЄ ПРАВО ЗМІНЯТИ КАТАЛОГИ, ПРОДУКЦІЮ, МОДЕЛІ І СПЕЦИФІКАЦІЇ.

GRUP		JCN 71	JCN 85	JCN 100	JCN 120
Stand By Gücü	kVA (kWe) A	71,0 [56,8] 102,6	85,0 [68,0] 122,8	100,0 [80,0] 144,5	120,0 [96,0]173,4
Prime güç	kVA (kWe) A	64,5 [51,6] 93,3	77,3 [61,8] 111,7	90,9 [72,7] 131,4	109,1 [87,3] 157,6
Sürekli Güç	kVA (kWe) A	45,2 [36,1] 65,3	54,1 [43,3] 78,2	63,6 [50,9] 92,0	76,4 [61,1] 110,4
Güç Faktörü	CosQ	0,8	0,8	0,8	0,8
Frekans	Hz	50	50	50	50
ENGINE					
Brend		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Model		E88JC	E105JCI	G125JC	G150JCI
Sürət	(RPM)	1500	1500	1500	1500
Mühərrikin Ümumi Gücü	(kW)	69,0	80,0	95,0	113,0
Mühərrikin Xalis Gücü	(kW)	65,0	76,0	91,0	110,0
Silindrlərin Sayı		4	4	4	4
Konfiqurasiya		Vertical,In-Line	Vertical,In-Line	Vertical,In-Line	Vertical,In-Line
Emissiya Sinfi		Tier II	Tier II	Tier II	Tier II
Aspirasiya		Turbocharged	Turbocharged/ Intercooler	Turbocharged	Turbocharged/ Intercooler
Requlyator Tipi		Mechanic	Mechanic	Electronic	Electronic
Silindir Həcmi	[L]	3,76	3,76	4,3	4,3
Bore and Stroke	[mm]	102 x 115	102 x 115	105 x 124	105 x 124
Sıxılma Nisbəti		17.5:1	17.5:1	17.3:1	16:1
Electric System	[V]	12	12	12	12
Fuel Consumption Prime- %50 Loaded	[L/h]	8,20	9,51	10,20	12,33
Fuel Consumption Prime- % 75 Loaded	[L/h]	11,48	13,31	15,53	18,77
Fuel Consumption Prime- % 100 Loaded	[L/h]	14,94	17,32	20,20	24,31
Fuel Consumption Standby- %100 Loaded	[L/h]	16,37	18,98	22,31	26,41
Fuel Tank Capacity, w/o Canopy (Canopy)	[lt]	134 [100]	161 [100]	161 [223]	161 [223]
ALTERNATOR					
Make		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Output Power	400 V-kVA	65,0	77,0	91,0	109,0
Overspeed	2U+1000V	2250	2250	2250	2250
Insulation Class		H	H	H	H
Ingress Protection Rating		IP-23	IP-23	IP-23	IP-23
Voltage		231 / 400 V	231 / 400 V	231 / 400 V	231 / 400 V
Voltage Regulation		±1	±1	±1	±1
DIMENSIONS					
Width, Open [Canopy]	[mm]	700 [1000]	700 [1000]	700 [1000]	700 [1000]
Length, Open [Canopy]	[mm]	1700 [2700]	1900 [2700]	1900 [3000]	1900 [3000]
Height, Open [Canopy]	[mm]	1562 [1190]	1562 [1190]	1562 [1380]	1562 [1380]
Weight, Open [Canopy]	[kg]	877 [1010]	957 [1080]	1024 [1200]	1067 [1240]

CE -VERTA-106188
-VERTA-106189

JCB ENERGY ЗАЛИШАЄ ПРАВО ЗМІНЯТИ КАТАЛОГИ, ПРОДУКЦІЮ, МОДЕЛІ І СПЕЦИФІКАЦІЇ.

ДИЗЕЛЬ-ГЕНЕРАТОР- СЕРІЯ JCN

ГРУПА		JCN 135	JCN 155	JCN 175	JCN 200
Stand By-Резервна потужність	kVA (kWe) A	135,0 [108,0] 195,1	155,0 [124,0] 224,0	175,0 [140,0] 252,9	200,0 [160,0] 289,0
Prime-Основна потужність	kVA (kWe) A	122,7 [98,2] 177,4	140,9 [112,7] 203,6	159,1 [127,3] 229,9	181,8 [145,5] 262,7
Стабільна потужність	kVA (kWe) A	85,9 [68,7] 124,1	98,6 [78,9] 142,5	111,4 [89,1] 160,9	127,3 [101,8] 183,9
Фактори сили	CosQ	0,8	0,8	0,8	0,8
Частота	Hz	50	50	50	50
ДВИГУН					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Модель		G170JC	G195JC	G220JC	G250JCI
Швидкість	(Д/хв.)	1500	1500	1500	1500
Загальна потужність двигуна	(kW)	127,0	140,0	167,0	189,0
Чиста потужність двигуна	(kW)	123,0	136,0	162,0	183,0
Кількість циліндрів		4	4	4	6
Конфігурація		Вертикальний горизонтальний	Вертикальний горизонтальний	Вертикальний горизонтальний	Вертикальний горизонтальний
Клас викидів		Tier II	Tier II	Tier II	Tier II
Аспірація		З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером
Тип регулятора		Електронний	Електронний	Електронний	Електронний
Об'єм циліндра	[L]	4,3	4,3	4,3	6,5
Bore ve Stroke	[mm]	105 x 124	105 x 124	105 x 124	105 x 124
Коефіцієнт стиснення		16:1	16:1	16:1	16:1
Електрична система	[V]	12	12	24	24
Економія палива - Prime 50% навантаження	[я/год] [1500 об/хв]	13,76	15,42	17,50	19,92
Економія палива - Prime 75% навантаження	[я/год] [1500 об/хв]	20,94	23,47	26,71	30,17
Економія палива - Prime 100% навантаження	[я/год] [1500 об/хв]	27,11	30,53	35,35	40,23
Режим очікування - Standby при навантаженні 110%	[я/год] [1500 об/хв]	29,68	33,59	38,84	43,95
Місткість паливного бака, Без кабіни [З кабіною]	[L]	190 [223]	190 [223]	256 [678]	256 [678]
АЛЬТЕРНАТОР					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Вихідна потужність	kVA	123,0	141,0	159,0	182,0
Надмірна кількість обертів за хвилину	д/хв	2250	2250	2250	2250
Клас ізоляції		H	H	H	H
Клас захисту		IP-23	IP-23	IP-23	IP-23
Напруга		231 / 400 V	231 / 400 V	231 / 400 V	231 / 400 V
Регулювання напруги		±1	±1	±1	±1
РОЗМІРИ					
Ширина - з кабіною [без кабіни]	[mm]	800 [1000]	800 [1000]	900 [1140]	900 [1140]
Довжина - з кабіною [без кабіни]	[mm]	2150 [3000]	2150 [3000]	2400 [3650]	2400 [3650]
Висота - з кабіною [без кабіни]	[mm]	1549 [1380]	1549 [1380]	1549 [1900]	1549 [1900]
Вага - з кабіною [без кабіни]	[kg]	1205 [1610]	1217 [1620]	1317 [1670]	1328 [1690]

CE -VERTA-106188
-VERTA-106189

JCB ENERGY ЗАЛИШАЄ ПРАВО ЗМІНЯТИ КАТАЛОГИ, ПРОДУКЦІЮ, МОДЕЛІ І СПЕЦИФІКАЦІЇ.

ГРУПА		JCN 235	JCN 255	JCN 280	JCN 300
Stand By-Резервна потужність	kVA (kWe) A	235,0 [188,0] 339,6	255,0 [204,0] 368,5	280,0 [224,0] 404,6	300,0 [240,0] 433,5
Prime-Основна потужність	kVA (kWe) A	213,6 [170,9] 308,7	231,8 [185,5] 335,0	254,5 [203,6] 367,8	272,7 [218,2] 394,1
Стабільна потужність	kVA (kWe) A	149,5 [119,6] 216,1	162,3 [129,8] 234,5	178,2 [142,5] 257,5	190,9 [152,7] 275,9
Фактори сили	CosQ	0,8	0,8	0,8	0,8
Частота	Hz	50	50	50	50
ДВИГУН					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Модель		G295JCI	C325JCI	C355JCI	C371JCI
Швидкість	(Д/хв.)	1500	1500	1500	1500
Загальна потужність двигуна	(kW)	220,0	228,0	250,0	276,0
Чиста потужність двигуна	(kW)	214,0	220,0	242,0	260,0
Кількість циліндрів		6	6	6	6
Конфігурація		Вертикальний горизонтальний	Вертикальний горизонтальний	Вертикальний горизонтальний	Вертикальний горизонтальний
Клас викидів		Tier II	Tier II	Tier II	Tier II
Аспірація		З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером
Тип регулятора		Електронний	Електронний	Електронний	Електронний
Об'єм циліндра	[L]	6,5	9,726	9,726	9,726
Bore ve Stroke	[mm]	105 x 124	126 x 130	126 x 130	126 x 130
Коефіцієнт стиснення		16:1	17:1	17:1	17:1
Електрична система	[V]	24	24	24	24
Економія палива - Prime 50% навантаження	[я/год] [1500 об/хв]	23,14	23,95	26,26	29,04
Економія палива - Prime 75% навантаження	[я/год] [1500 об/хв]	35,06	34,66	38,01	42,03
Економія палива - Prime 100% навантаження	[я/год] [1500 об/хв]	47,45	45,73	50,15	55,45
Режим очікування - Standby при навантаженні 110%	[я/год] [1500 об/хв]	51,42	50,37	55,23	60,98
Місткість паливного бака, Без кабіни [З кабіною]	[L]	256 [678]	256 [678]	256 [678]	475 [678]
АЛЬТЕРНАТОР					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Вихідна потужність	kVA	214,0	232,0	255,0	273,0
Надмірна кількість обертів за хвилину	д/хв	2250	2250	2250	2250
Клас ізоляції		H	H	H	H
Клас захисту		IP-23	IP-23	IP-23	IP-23
Напруга		231 / 400 V	231 / 400 V	231 / 400 V	231 / 400 V
Регулювання напруги		±1	±1	±1	±1
РОЗМІРИ					
Ширина - з кабіною [без кабіни]	[mm]	900 [1140]	900 [1140]	900 [1140]	1100 [1140]
Довжина - з кабіною [без кабіни]	[mm]	2400 [3650]	2400 [4100]	2400 [4100]	3095 [4100]
Висота - з кабіною [без кабіни]	[mm]	1549 [1900]	1840 [1900]	1840 [1900]	1782 [1900]
Вага - з кабіною [без кабіни]	[kg]	1450 [1810]	1554 [1940]	1589 [2010]	2159 [2600]

CE -VERTA-106188
-VERTA-106189

JCB ENERGY ЗАЛИШАЄ ПРАВО ЗМІНЯТИ КАТАЛОГИ, ПРОДУКЦІЮ, МОДЕЛІ І СПЕЦИФІКАЦІЇ.

ДИЗЕЛЬ-ГЕНЕРАТОР- СЕРІЯ JCN

ГРУПА		JCN 350	JCN 410	JCN 450	JCN 475
Stand By-Резервна потужність	kVA (kWe) A	350,0 [280,0] 505,8	410,0 [328,0] 592,5	450,0 [360,0] 650,3	475,0 [380,0] 686,4
Prime-Основна потужність	kVA (kWe) A	318,2 [254,5] 459,8	372,7 [298,2] 538,6	409,1 [327,3] 591,2	431,8 [345,5] 624,0
Стабільна потужність	kVA (kWe) A	222,7 [178,2] 321,9	260,9 [208,7] 377,0	286,4 [229,1] 413,8	302,3 [241,8] 436,8
Фактори сили	CosQ	0,8	0,8	0,8	0,8
Частота	Hz	50	50	50	50
ДВИГУН					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Модель		C433JCI	C507JCI	C556JCI	C587JCI
Швидкість	(Д/хв.)	1500	1500	1500	1500
Загальна потужність двигуна	(kW)	317,0	365,0	400,0	426,0
Чиста потужність двигуна	(kW)	301,0	349,0	384,0	404,0
Кількість циліндрів		6	6	6	6
Конфігурація		Вертикальний горизонтальний	Вертикальний горизонтальний	Вертикальний горизонтальний	Вертикальний горизонтальний
Клас викидів		Tier II	Tier II	Tier II	Tier II
Аспірація		З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером
Тип регулятора		Електронний	Електронний	Електронний	Електронний
Об'єм циліндра	[L]	9,726	9,726	9,726	11,596
Bore ve Stroke	[mm]	126 x 130	126 x 130	126 x 130	126 x 155
Коефіцієнт стиснення		17:1	17:1	17:1	17:1
Електрична система	[V]	24	24	24	24
Економія палива - Prime 50% навантаження	[я/год] [1500 об/хв]	33,44	38,53	42,11	45,01
Економія палива - Prime 75% навантаження	[я/год] [1500 об/хв]	48,39	55,76	60,95	65,13
Економія палива - Prime 100% навантаження	[я/год] [1500 об/хв]	63,85	73,57	80,84	85,94
Режим очікування - Standby при навантаженні 110%	[я/год] [1500 об/хв]	70,03	80,64	88,84	94,12
Місткість паливного бака, Без кабіни [З кабіною]	[L]	475 [678]	475 [678]	475 [678]	673 [678]
АЛЬТЕРНАТОР					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Вихідна потужність	kVA	318,0	373,0	409,0	432,0
Надмірна кількість обертів за хвилину	д/хв	2250	2250	2250	2250
Клас ізоляції		H	H	H	H
Клас захисту		IP-23	IP-23	IP-23	IP-23
Напруга		231 / 400 V	231 / 400 V	231 / 400 V	231 / 400 V
Регулювання напруги		±1	±1	±1	±1
РОЗМІРИ					
Ширина - з кабіною [без кабіни]	[mm]	1100 [1140]	1100 [1140]	1100 [1140]	1200 [1140]
Довжина - з кабіною [без кабіни]	[mm]	3095 [4100]	3254 [4100]	3254 [4100]	3374 [4100]
Висота - з кабіною [без кабіни]	[mm]	1782 [1900]	1782 [1900]	1782 [1900]	1953 [1900]
Вага - з кабіною [без кабіни]	[kg]	2163 [2600]	2353 [2790]	2379 [2970]	2761 [3620]

CE -VERTA-106188
-VERTA-106189

JCB ENERGY ЗАЛИШАЄ ПРАВО ЗМІНЯТИ КАТАЛОГИ, ПРОДУКЦІЮ, МОДЕЛІ І СПЕЦИФІКАЦІЇ.

ГРУПА		JCN 515	JCN 565	JCN 610	JCN 610P
Stand By-Резервна потужність	kVA (kWe) A	515,0 [412,0] 744,2	565,0 [452,0] 816,5	610,0 [488,0] 881,5	610,0 [488,0] 881,5
Prime-Основна потужність	kVA (kWe) A	468,2 [375,5] 676,6	513,6 [410,9] 742,2	554,5 [443,6] 801,4	554,5 [443,6] 801,4
Стабільна потужність	kVA (kWe) A	327,7 [262,2] 473,6	359,5 [287,6] 519,6	388,2 [310,5] 561,0	388,2 [310,5] 561,0
Фактори сили	CosQ	0,8	0,8	0,8	0,8
Частота	Hz	50	50	50	50
ДВИГУН					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Модель		C673JCI	C699JCI	C754JCI	B765JCI
Швидкість	(Д/хв.)	1500	1500	1500	1500
Загальна потужність двигуна	(kW)	460,0	500,0	538,0	554,1
Чиста потужність двигуна	(kW)	438,0	478,0	514,0	529,4
Кількість циліндрів		6	6	6	8
Конфігурація		Вертикальний горизонтальний	Вертикальний горизонтальний	Вертикальний горизонтальний	V-Tipi
Клас викидів		Tier II	Tier II	Tier II	Tier II
Аспірація		З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером
Тип регулятора		Електронний	Електронний	Електронний	Електронний
Об'єм циліндра	[L]	11,596	11,596	12,56	15,948
Bore ve Stroke	[mm]	126 x 155	126 x 155	127 x 165	128 x 155
Коефіцієнт стиснення		17:1	17:1	17:1	15,5:1
Електрична система	[V]	24	24	24	24
Економія палива - Prime 50% навантаження	[я/год] [1500 об/хв]	48,59	52,64	56,69	58,39
Економія палива - Prime 75% навантаження	[я/год] [1500 об/хв]	70,33	76,19	82,05	86,71
Економія палива - Prime 100% навантаження	[я/год] [1500 об/хв]	92,79	100,52	108,26	115,02
Режим очікування - Standby при навантаженні 110%	[я/год] [1500 об/хв]	101,63	110,47	118,86	125,00
Місткість паливного бака, Без кабіни [З кабіною]	[L]	673 [678]	673 [400]	1193 [400]	1066 [400]
АЛЬТЕРНАТОР					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Вихідна потужність	kVA	468,0	514,0	555,0	555,0
Надмірна кількість обертів за хвилину	д/хв	2250	2250	2250	2250
Клас ізоляції		H	H	H	H
Клас захисту		IP-23	IP-23	IP-23	IP-23
Напруга		231 / 400 V	231 / 400 V	231 / 400 V	231 / 400 V
Регулювання напруги		±1	±1	±1	±1
РОЗМІРИ					
Ширина - з кабіною [без кабіни]	[mm]	1200 [1140]	1200 [1646]	1400 [1646]	1400 [1646]
Довжина - з кабіною [без кабіни]	[mm]	3374 [4100]	3383 [4632]	3600 [4632]	3311 [4632]
Висота - з кабіною [без кабіни]	[mm]	1953 [1900]	1953 [2641]	2070 [2641]	1980 [2641]
Вага - з кабіною [без кабіни]	[kg]	2878 [3740]	2931 [3790]	3325 [4070]	3386 [4240]

CE -VERTA-106188
-VERTA-106189

JCB ENERGY ЗАЛИШАЄ ПРАВО ЗМІНЯТИ КАТАЛОГИ, ПРОДУКЦІЮ, МОДЕЛІ І СПЕЦИФІКАЦІЇ.

ДИЗЕЛЬ-ГЕНЕРАТОР- СЕРІЯ JCN

ГРУПА		JCN 630	JCN 630P	JCN 660	JCN 660P
Stand By-Резервна потужність	kVA (kWe) A	630,0 [504,0] 910,0	630,0 [504,0] 910,0	660,0 [528,0] 953,8	660,0 [528,0] 953,8
Prime-Основна потужність	kVA (kWe) A	573,0 [458,0] 828,0	573,0 [458,6] 828,0	600,0 [480,0] 867,1	600,0 [480,3] 867,1
Стабільна потужність	kVA (kWe) A	401,0 [321,0] 579,0	401,0 [321,5] 579,0	420,0 [336,0] 606,9	420,0 [336,0] 606,9
Фактори сили	CosQ	0,8	0,8	0,8	0,8
Частота	Hz	50	50	50	50
ДВИГУН					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Модель		C779JCI	B790JCI	C816JCI	B825JCI
Швидкість	(Д/хв.)	1500	1500	1500	1500
Загальна потужність двигуна	(kW)	558,0	574,7	580,0	597,4
Чиста потужність двигуна	(kW)	536,0	552,1	556,0	572,7
Кількість циліндрів		6	8	6	8
Конфігурація		Вертикальний горизонтальний	V-Tipi	Вертикальний горизонтальний	V-Tipi
Клас викидів		Tier II	Tier II	Tier II	Tier II
Аспірація		З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером
Тип регулятора		Електронний	Електронний	Електронний	Електронний
Об'єм циліндра	[L]	12,56	15,948	12,56	15,948
Bore ve Stroke	[mm]	127 x 165	128 x 155	127 x 165	128 x 155
Коефіцієнт стиснення		17:1	15,5:1	17:1	15,5:1
Електрична система	[V]	24	24	24	24
Економія палива - Prime 50% навантаження	[я/год] [1500 об/хв]	58,66	60,42	60,97	62,80
Економія палива - Prime 75% навантаження	[я/год] [1500 об/хв]	84,86	89,72	88,97	93,26
Економія палива - Prime 100% навантаження	[я/год] [1500 об/хв]	112,01	119,02	116,43	123,71
Режим очікування - Standby при навантаженні 110%	[я/год] [1500 об/хв]	123,28	129,65	128,14	134,76
Місткість паливного бака, Без кабіни [З кабіною]	[L]	1193 [400]	1066 [400]	1193 [400]	1066 [400]
АЛЬТЕРНАТОР					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Вихідна потужність	kVA	573,0	573,0	600,0	600,0
Надмірна кількість обертів за хвилину	д/хв	2250	2250	2250	2250
Клас ізоляції		H	H	H	H
Клас захисту		IP-23	IP-23	IP-23	IP-23
Напруга		231 / 400 V	231 / 400 V	231 / 400 V	231 / 400 V
Регулювання напруги		±1	±1	±1	±1
РОЗМІРИ					
Ширина - з кабіною [без кабіни]	[mm]	1400 [1646]	1400 [1646]	1400 [1646]	1400 [1646]
Довжина - з кабіною [без кабіни]	[mm]	3600 [4632]	3311 [4632]	3600 [4632]	3311 [4632]
Висота - з кабіною [без кабіни]	[mm]	2070 [2641]	1980 [2641]	2070 [2641]	1980 [2641]
Вага - з кабіною [без кабіни]	[kg]	3325 [4070]	3386 [4240]	3444 [4190]	3386 [4240]

CE -VERTA-106188
-VERTA-106189

JCB ENERGY ЗАЛИШАЄ ПРАВО ЗМІНЯТИ КАТАЛОГИ, ПРОДУКЦІЮ, МОДЕЛІ І СПЕЦИФІКАЦІЇ.

ГРУПА		JCN 725	JCN 770	JCN 825	JCN 850
Stand By-Резервна потужність	kVA (kWe) A	725,0 [580,0] 1.047,7	770,0 [616,0] 1.112,7	825,0 [660,0] 1.192,2	850,0 [680,0] 1.228,3
Prime-Основна потужність	kVA (kWe) A	659,1 [527,3] 952,4	700,0 [560,0] 1.011,6	750,0 [600,0] 1.083,8	772,7 [618,2] 1.116,7
Стабільна потужність	kVA (kWe) A	461,4 [369,1] 666,7	490,0 [392,0] 708,1	525,0 [420,0] 758,7	540,9 [432,7] 781,7
Фактори сили	CosQ	0,8	0,8	0,8	0,8
Частота	Hz	50	50	50	50
ДВИГУН					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Модель		B896JCI	B952JCI	B1020JCI	B1051JCI
Швидкість	(Д/хв.)	1500	1500	1500	1500
Загальна потужність двигуна	(kW)	710,0	672,0	725,0	745,0
Чиста потужність двигуна	(kW)	681,9	649,0	695,0	715,0
Кількість циліндрів		8	8	12	12
Конфігурація		V-Tipi	V-Tipi	V-Tipi	V-Tipi
Клас викидів		Tier II	Tier II	Tier II	Tier II
Аспірація		З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером
Тип регулятора		Електронний	Електронний	Електронний	Електронний
Об'єм циліндра	[L]	15,948	15,948	23,922	23,922
Bore ve Stroke	[mm]	128 x 155	128 x 155	128 x 155	128 x 155
Коефіцієнт стиснення		15,5:1	15,5:1	15,5:1	15,5:1
Електрична система	[V]	24	24	24	24
Економія палива - Prime 50% навантаження	[я/год] [1500 об/хв]	66,84	70,81	76,36	78,44
Економія палива - Prime 75% навантаження	[я/год] [1500 об/хв]	99,30	105,14	113,39	116,48
Економія палива - Prime 100% навантаження	[я/год] [1500 об/хв]	131,73	139,48	150,42	154,52
Режим очікування - Standby при навантаженні 110%	[я/год] [1500 об/хв]	143,02	151,59	163,55	168,06
Місткість паливного бака, Без кабіни [З кабіною]	[L]	1066 [400]	1066 [400]	1193 [530]	1193 [530]
АЛЬТЕРНАТОР					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Вихідна потужність	kVA	659,0	700,0	750,0	773,0
Надмірна кількість обертів за хвилину	д/хв	2250	2250	2250	2250
Клас ізоляції		H	H	H	H
Клас захисту		IP-23	IP-23	IP-23	IP-23
Напруга		231 / 400 V	231 / 400 V	231 / 400 V	231 / 400 V
Регулювання напруги		±1	±1	±1	±1
РОЗМІРИ					
Ширина - з кабіною [без кабіни]	[mm]	1400 [1646]	1400 [1646]	1400 [1942]	1400 [1942]
Довжина - з кабіною [без кабіни]	[mm]	3311 [4632]	3311 [4632]	4000 [5166]	4000 [5166]
Висота - з кабіною [без кабіни]	[mm]	1980 [2641]	1980 [2641]	2188 [2920]	2188 [2920]
Вага - з кабіною [без кабіни]	[kg]	3386 [4240]	3476 [4320]	4250 [5530]	4250 [5540]

CE -VERTA-106188
-VERTA-106189

JCB ENERGY ЗАЛИШАЄ ПРАВО ЗМІНЯТИ КАТАЛОГИ, ПРОДУКЦІЮ, МОДЕЛІ І СПЕЦИФІКАЦІЇ.

ДИЗЕЛЬ-ГЕНЕРАТОР- СЕРІЯ JCN

ГРУПА		JCN 935	JCN 1000	JCN 1100	JCN 1250
Stand By-Резервна потужність	kVA (kWe) A	935,0 [748,0] 1.351,2	1.000,0 [800,0] 1.445,1	1.100,0 [880,0] 1.589,6	1.250,0 [1.000,0] 1.806,4
Prime-Основна потужність	kVA (kWe) A	850,0 [680,0] 1.228,3	909,1 [727,3] 1.313,7	1.000,0 [800,0] 1.445,1	1.136,4 [909,1] 1.642,1
Стабільна потужність	kVA (kWe) A	595,0 [476,0] 859,8	636,4 [509,1] 919,6	700,0 [560,0] 1.011,6	795,5 [636,4] 1.149,5
Фактори сили	CosQ	0,8	0,8	0,8	0,8
Частота	Hz	50	50	50	50
ДВИГУН					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Модель		B1156JCI	B1236JCI	B1360JCI	A1545JCI
Швидкість	(Д/хв.)	1500	1500	1500	1500
Загальна потужність двигуна	(kW)	817,0	872,0	950,0	1070,0
Чиста потужність двигуна	(kW)	787,0	842,0	920,0	1047,0
Кількість циліндрів		12	12	12	12
Конфігурація		V-Tipi	V-Tipi	V-Tipi	V-Tipi
Клас викидів		Tier II	Tier II	Tier II	Tier II
Аспірація		З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером
Тип регулятора		Електронний	Електронний	Електронний	Електронний
Об'єм циліндра	[L]	23,922	23,922	23,922	32,7
Bore ve Stroke	[mm]	128 x 155	128 x 155	128 x 155	127 x 165
Коефіцієнт стиснення		15,5:1	15,5:1	15,5:1	15,5:1
Електрична система	[V]	24	24	24	24
Економія палива - Prime 50% навантаження	[я/год] [1500 об/хв]	86,19	91,98	100,43	59,6
Економія палива - Prime 75% навантаження	[я/год] [1500 об/хв]	127,99	136,58	149,12	88,5
Економія палива - Prime 100% навантаження	[я/год] [1500 об/хв]	169,79	181,19	197,82	116,2
Режим очікування - Standby при навантаженні 110%	[я/год] [1500 об/хв]	184,30	196,71	214,30	129,6
Місткість паливного бака, Без кабіни [З кабіною]	[L]	1193 [530]	1193 [530]	1193 [530]	2000 [2000]
АЛЬТЕРНАТОР					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Вихідна потужність	kVA	850,0	909,0	1000,0	1136,0
Надмірна кількість обертів за хвилину	д/хв	2250	2250	2250	2250
Клас ізоляції		H	H	H	H
Клас захисту		IP-23	IP-23	IP-23	IP-23
Напруга		231 / 400 V	231 / 400 V	231 / 400 V	231 / 400 V
Регулювання напруги		±1	±1	±1	±1
РОЗМІРИ					
Ширина - з кабіною [без кабіни]	[mm]	1400 [1942]	1400 [1942]	1400 [1942]	1800 [2144]
Довжина - з кабіною [без кабіни]	[mm]	4000 [5166]	4000 [5166]	4000 [5166]	4200 [5916]
Висота - з кабіною [без кабіни]	[mm]	2188 [2920]	2188 [2920]	2188 [2920]	2135 [2759]
Вага - з кабіною [без кабіни]	[kg]	4358 [5640]	4558 [5870]	4667 [5960]	6470 [9810]

CE -VERTA-106188
-VERTA-106189

JCB ENERGY ЗАЛИШАЄ ПРАВО ЗМІНЯТИ КАТАЛОГИ, ПРОДУКЦІЮ, МОДЕЛІ І СПЕЦИФІКАЦІЇ.

ГРУПА		JCN 1400	JCN 1560	JCN 1650	JCN 1750
Stand By-Резервна потужність	kVA (kWe) A	1.400,0 [1.120,0] 2.023,1	1.560,0 [1.248,0] 2.254,3	1.650,0 [1.320,0] 2.384,4	1.750,0 [1.400,0] 2.528,9
Prime-Основна потужність	kVA (kWe) A	1.272,7 [1.018,2] 1.839,2	1.418,2 [1.134,5] 1.049,4	1.500,0 [1.200,0] 2.167,6	1.590,9 [1.272,0] 2.299,0
Стабільна потужність	kVA (kWe) A	890,9 [712,7] 1.287,4	992,7 [794,2] 1.434,6	1.050,0 [840,0] 1.517,3	1.113,6 [890,9] 1.609,3
Фактори сили	CosQ	0,8	0,8	0,8	0,8
Частота	Hz	50	50	50	50
ДВИГУН					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Модель		A1732JCI	A1928JCI	A2040JCI	A2164JC
Швидкість	(Д/хв.)	1500	1500	1500	1500
Загальна потужність двигуна	(kW)	1200,0	1334,0	1410,0	1500,0
Чиста потужність двигуна	(kW)	1169,0	1303,0	1375,0	1465,0
Кількість циліндрів		12	12	12	12
Конфігурація		V-Tipi	V-Tipi	V-Tipi	V-Tipi
Клас викидів		Tier II	Tier II	Tier II	Tier II
Аспірація		З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером
Тип регулятора		Електронний	Електронний	Електронний	Електронний
Об'єм циліндра	[L]	32,7	32,7	35,9	35,9
Bore ve Stroke	[mm]	145 x 155	145 x 155	152 x 165	152 x 165
Коефіцієнт стиснення		15,5:1	15,5:1	14:1	14:1
Електрична система	[V]	24	24	24	24
Економія палива - Prime 50% навантаження	[я/год] [1500 об/хв]	126,11	140,34	148,67	157,70
Економія палива - Prime 75% навантаження	[я/год] [1500 об/хв]	187,26	208,40	220,77	234,17
Економія палива - Prime 100% навантаження	[я/год] [1500 об/хв]	248,42	276,45	292,86	310,64
Режим очікування - Standby при навантаженні 110%	[я/год] [1500 об/хв]	276,28	307,13	324,63	345,35
Місткість паливного бака, Без кабіни [З кабіною]	[L]	2250 [2250]	2250 [2250]	2500 [2500]	2500 [2500]
АЛЬТЕРНАТОР					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Вихідна потужність	kVA	1273,0	1418,0	1500,0	1591,0
Надмірна кількість обертів за хвилину	д/хв	2250	2250	2250	2250
Клас ізоляції		H	H	H	H
Клас захисту		IP-23	IP-23	IP-23	IP-23
Напруга		231 / 400 V	231 / 400 V	231 / 400 V	231 / 400 V
Регулювання напруги		±1	±1	±1	±1
РОЗМІРИ					
Ширина - з кабіною [без кабіни]	[mm]	2000 [2390]	2000 [2390]	2465 [2418]	2465 [2418]
Довжина - з кабіною [без кабіни]	[mm]	4500 [6769]	4500 [6769]	4500 [7885]	4500 [7885]
Висота - з кабіною [без кабіни]	[mm]	2310 [3156]	2310 [3156]	2463 [3308]	2463 [3308]
Вага - з кабіною [без кабіни]	[kg]	7120 [11500]	7210 [11870]	7540 [11870]	7820 [12320]

CE -VERTA-106188
-VERTA-106189

JCB ENERGY ЗАЛИШАЄ ПРАВО ЗМІНЯТИ КАТАЛОГИ, ПРОДУКЦІЮ, МОДЕЛІ І СПЕЦИФІКАЦІЇ.

ДИЗЕЛЬ-ГЕНЕРАТОР- СЕРІЯ JCN

ГРУПА		JCN 1925	JCN 2000	JCN 2250	JCN 2500
Stand By-Резервна потужність	kVA (kWe) A	1.925,0 [1.540,0] 2.781,8	2.000,0 [1.600,0] 2.890,2	2.250,0 [1.800,0] 3.251,4	2.500,0 [2.000,0] 3.612,7
Prime-Основна потужність	kVA (kWe) A	1.750,0 [1.400,0] 2.528,9	1.818,2 [1.454,5] 2.627,4	2.045,5 [1.636,4] 2.955,9	2.272,7 [1.818,2] 2.284,3
Стабільна потужність	kVA (kWe) A	1.225,0 [980,0] 1.770,2	1.272,7 [1.018,2] 1.839,2	1.431,8 [1.145,5] 2.069,1	1.590,9 [1.272,7] 2.299,0
Фактори сили	CosQ	0,8	0,8	0,8	0,8
Частота	Hz	50	50	50	50
ДВИГУН					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Модель		A2380JCI	Y2473JCI	Y2782JCI	Y3091JCI
Швидкість	(Д/хв.)	1500	1500	1500	1500
Загальна потужність двигуна	(kW)	1640,0	1725,0	1950,0	2160,0
Чиста потужність двигуна	(kW)	1605,0	1667,0	1875,0	2085,0
Кількість циліндрів		12	12	12	12
Конфігурація		V-Tipi	V-Tipi	V-Tipi	V-Tipi
Клас викидів		Tier II	Tier II	Tier II	Tier II
Аспірація		З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером
Тип регулятора		Електронний	Електронний	Електронний	Електронний
Об'єм циліндра	[L]	35,9	79,17	79,17	79,17
Bore ve Stroke	[mm]	152 x 165	200 x 210	200 x 210	200 x 210
Коефіцієнт стиснення		14:1	13,5:1	13,5:1	13,5:1
Електрична система	[V]	24	24	24	24
Економія палива - Prime 50% навантаження	[я/год] [1500 об/хв]	172,74	191,69	217,33	240,52
Економія палива - Prime 75% навантаження	[я/год] [1500 об/хв]	256,50	273,84	310,47	343,60
Економія палива - Prime 100% навантаження	[я/год] [1500 об/хв]	340,27	363,29	411,88	455,85
Режим очікування - Standby при навантаженні 110%	[я/год] [1500 об/хв]	377,58	397,15	448,95	497,30
Місткість паливного бака, Без кабіни [З кабіною]	[L]	3000 [3000]	3000 [3000]	3500 [3500]	4000 [4000]
АЛЬТЕРНАТОР					
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY	JCB ENERGY
Вихідна потужність	kVA	1750,0	1818,0	2045,0	2300,0
Надмірна кількість обертів за хвилину	д/хв	2250	2250	2250	2250
Клас ізоляції		H	H	H	H
Клас захисту		IP-23	IP-23	IP-23	IP-23
Напруга		231 / 400 V	231 / 400 V	231 / 400 V	231 / 400 V
Регулювання напруги		±1	±1	±1	±1
РОЗМІРИ					
Ширина - з кабіною [без кабіни]	[mm]	2465 [2418]	2600 [2800]	2600 [2800]	2600 [2800]
Довжина - з кабіною [без кабіни]	[mm]	4500 [7885]	5700 [9000]	5700 [9000]	5700 [9000]
Висота - з кабіною [без кабіни]	[mm]	2463 [3308]	2463 [2900]	2463 [2900]	2463 [2900]
Вага - з кабіною [без кабіни]	[kg]	8270 [18350]	13330 [18350]	13570 [18590]	13870 [18890]

CE -VERTA-106188
-VERTA-106189

JCB ENERGY ЗАЛИШАЄ ПРАВО ЗМІНЯТИ КАТАЛОГИ, ПРОДУКЦІЮ, МОДЕЛІ І СПЕЦИФІКАЦІЇ.

ГРУПА		JCN 2750	JCN 3000	JCN 3300
Stand By-Резервна потужність	kVA (kWe) A	2.750,0 [2.200,0] 3.974,0	3.000,0 [2.400,0] 4.335,3	3.300,0 [2.640,0] 4.768,8
Prime-Основна потужність	kVA (kWe) A	2.500,0 [2.000,0] 3.612,7	2.727,3 [2.181,8] 3.941,1	3.000,0 [2.400,0] 4.335,3
Стабільна потужність	kVA (kWe) A	1.750,0 [1.400,0] 2.528,9	1.909,1 [1.527,3] 2.758,8	2.100,0 [1.680,0] 3.034,7
Фактори сили	CosQ	0,8	0,8	0,8
Частота	Hz	50	50	50
ДВИГУН				
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY
Модель		Y3400JCI	Y3709JCI	Y4080JCI
Швидкість	(Д/хв.)	1500	1500	1500
Загальна потужність двигуна	(kW)	2390,0	2600,0	2850,0
Чиста потужність двигуна	(kW)	2292,0	2502,0	2752,0
Кількість циліндрів		16	16	16
Конфігурація		V-Tipi	V-Tipi	V-Tipi
Клас викидів		Tier II	Tier II	Tier II
Аспірація		З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером	З турбонаддувом/інтеркулером
Тип регулятора		ECU	ECU	ECU
Об'єм циліндра	[L]	105,56	105,56	105,56
Bore ve Stroke	[mm]	200 x 210	200 x 210	200 x 210
Коефіцієнт стиснення		13,5:1	13,5:1	13,5:1
Електрична система	[V]	24	24	24
Економія палива - Prime 50% навантаження	[я/год] [1500 об/хв]	266,16	289,36	317,44
Економія палива - Prime 75% навантаження	[я/год] [1500 об/хв]	380,23	413,37	453,49
Економія палива - Prime 100% навантаження	[я/год] [1500 об/хв]	220,8	548,41	601,63
Режим очікування - Standby при навантаженні 110%	[я/год] [1500 об/хв]	504,44	598,60	656,16
Місткість паливного бака, Без кабіни [З кабіною]	[L]	4000 [4000]	5000 [5000]	6000 [6000]
АЛЬТЕРНАТОР				
Бренд		JCB ENERGY	JCB ENERGY	JCB ENERGY
Вихідна потужність	kVA	2500,0	2727,0	3000,0
Надмірна кількість обертів за хвилину	д/хв	2250	2250	2250
Клас ізоляції		H	H	H
Клас захисту		IP-23	IP-23	IP-23
Напруга		231 / 400 V	231 / 400 V	231 / 400 V
Регулювання напруги		±1	±1	±1
РОЗМІРИ				
Ширина - з кабіною [без кабіни]	[mm]	2400 [2430]	2400 [2430]	2400 [2430]
Довжина - з кабіною [без кабіни]	[mm]	7500 [12000]	7500 [12000]	7500 [12000]
Висота - з кабіною [без кабіни]	[mm]	3100 [3300]	3100 [3300]	3100 [3300]
Вага - з кабіною [без кабіни]	[kg]	18000 [24500]	19000 [26000]	19500 [26500]

CE -VERTA-106188
-VERTA-106189

JCB ENERGY ЗАЛИШАЄ ПРАВО ЗМІНЯТИ КАТАЛОГИ, ПРОДУКЦІЮ, МОДЕЛІ І СПЕЦИФІКАЦІЇ.

НАШІ СЕРТИФІКАТИ

GCR CERT

CERTIFICATE

JCB ENERGY ELECTRIC POWER INDUSTRY

CALLE DE TRESPADERNE, NUM 7
PLANTA 3, PUERTA C
28042 MADRID - (MADRID), SPAIN

In recognition of the organization's Management System which complies with

ISO 10002:2018

The scope of activities covered by this certificate is defined below

PRODUCTION, SALES AND SERVICE OF DIESEL GENERATORS, PORTABLE GENERATORS, GAS GENERATORS, LIGHT TOWER GENERATORS, WELDING GENERATORS, TRAILER GENERATORS, GENERATOR SPARE PARTS, SYNCHRONIZED SYSTEM, WATER PUMPS, ALTERNATORS, FORKLIFTS, UPS, REGULATORS, CONVERTERS, SHUTTER POWER SOURCES, TRANSFORMERS, SOLAR PANELS

Certificate Number : GCR/CERT-10.2023.3525
Certificate Issue Date : 25.10.2023
Certificate Validity : 24.10.2025

Abimanyu Gaurav
Approval

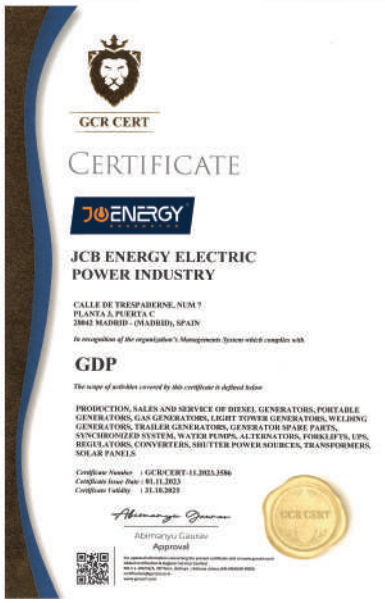
GCR CERT

CERTIFICATE

JCB ENERGY ELECTRIC POWER INDUSTRY

CALLE DE TRESPADERNE, NUM 7
PLANTA 3, PUERTA C
28042 MADRID - (MADRID), SPAIN

In recognition of the organization's Management System which complies with

GDP

The scope of activities covered by this certificate is defined below

PRODUCTION, SALES AND SERVICE OF DIESEL GENERATORS, PORTABLE GENERATORS, GAS GENERATORS, LIGHT TOWER GENERATORS, WELDING GENERATORS, TRAILER GENERATORS, GENERATOR SPARE PARTS, SYNCHRONIZED SYSTEM, WATER PUMPS, ALTERNATORS, FORKLIFTS, UPS, REGULATORS, CONVERTERS, SHUTTER POWER SOURCES, TRANSFORMERS, SOLAR PANELS

Certificate Number : GCR/CERT-11.2023.3586
Certificate Issue Date : 01.11.2023
Certificate Validity : 31.10.2025

Abimanyu Gaurav
Approval

GCR CERT

CERTIFICATE

JCB ENERGY ELECTRIC POWER INDUSTRY

CALLE DE TRESPADERNE, NUM 7
PLANTA 3, PUERTA C
28042 MADRID - (MADRID), SPAIN

In recognition of the organization's Management System which complies with

GHP

The scope of activities covered by this certificate is defined below

PRODUCTION, SALES AND SERVICE OF DIESEL GENERATORS, PORTABLE GENERATORS, GAS GENERATORS, LIGHT TOWER GENERATORS, WELDING GENERATORS, TRAILER GENERATORS, GENERATOR SPARE PARTS, SYNCHRONIZED SYSTEM, WATER PUMPS, ALTERNATORS, FORKLIFTS, UPS, REGULATORS, CONVERTERS, SHUTTER POWER SOURCES, TRANSFORMERS, SOLAR PANELS

Certificate Number : GCR/CERT-11.2023.3587
Certificate Issue Date : 01.11.2023
Certificate Validity : 31.10.2025

Abimanyu Gaurav
Approval

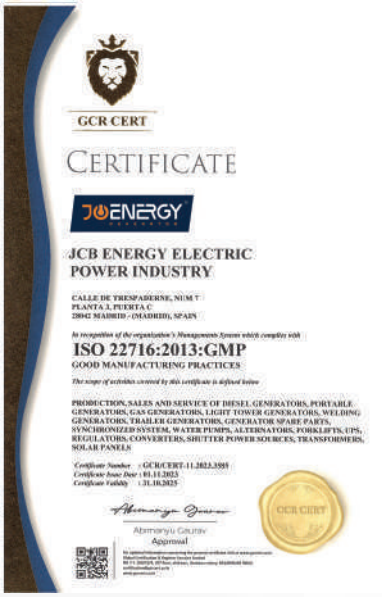
GCR CERT

CERTIFICATE

JCB ENERGY ELECTRIC POWER INDUSTRY

CALLE DE TRESPADERNE, NUM 7
PLANTA 3, PUERTA C
28042 MADRID - (MADRID), SPAIN

In recognition of the organization's Management System which complies with

ISO 22716:2013:GMP
GOOD MANUFACTURING PRACTICES

The scope of activities covered by this certificate is defined below

PRODUCTION, SALES AND SERVICE OF DIESEL GENERATORS, PORTABLE GENERATORS, GAS GENERATORS, LIGHT TOWER GENERATORS, WELDING GENERATORS, TRAILER GENERATORS, GENERATOR SPARE PARTS, SYNCHRONIZED SYSTEM, WATER PUMPS, ALTERNATORS, FORKLIFTS, UPS, REGULATORS, CONVERTERS, SHUTTER POWER SOURCES, TRANSFORMERS, SOLAR PANELS

Certificate Number : GCR/CERT-11.2023.3585
Certificate Issue Date : 01.11.2023
Certificate Validity : 31.10.2025

Abimanyu Gaurav
Approval

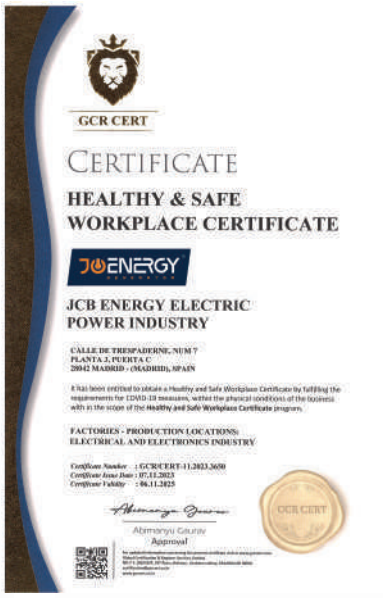
GCR CERT

CERTIFICATE

HEALTHY & SAFE WORKPLACE CERTIFICATE

JCB ENERGY ELECTRIC POWER INDUSTRY

CALLE DE TRESPADERNE, NUM 7
PLANTA 3, PUERTA C
28042 MADRID - (MADRID), SPAIN

It has been entitled to obtain a Healthy and Safe Workplace Certificate by fulfilling the requirements for COVID-19 measures, within the physical conditions of the business with in the scope of the **Healthy and Safe Workplace Certificate** program.

FACTORIES - PRODUCTION LOCATIONS:
ELECTRICAL AND ELECTRONICS INDUSTRY

Certificate Number : GCR/CERT-11.2023.3650
Certificate Issue Date : 07.11.2023
Certificate Validity : 06.11.2025

Abimanyu Gaurav
Approval

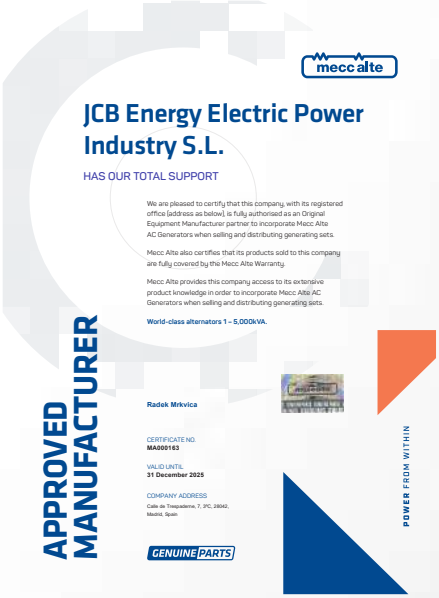
mecc alte

JCB Energy Electric Power Industry S.L.

HAS OUR TOTAL SUPPORT

We are pleased to certify that this company, with its registered office (address as below), is fully authorised as an Original Equipment Manufacturer partner to incorporate Mecc Alte AC Generators when selling and distributing generating sets.

Mecc Alte also certifies that its products sold to this company are fully covered by the Mecc Alte Warranty.

Mecc Alte provides this company access to its extensive product knowledge in order to incorporate Mecc Alte AC Generators when selling and distributing generating sets.

World-class alternators 1 – 5,000kVA.

APPROVED MANUFACTURER

Radek Mrkvica

CERTIFICATE NO.
MA000163

VALID UNTIL
31 December 2025

COMPANY ADDRESS
Calle de Trespaderne, 7, 3ºC, 28042, Madrid, Spain

GENUINE PARTS

POWER FROM WITHIN

CE -VERTA-106188
-VERTA-106189

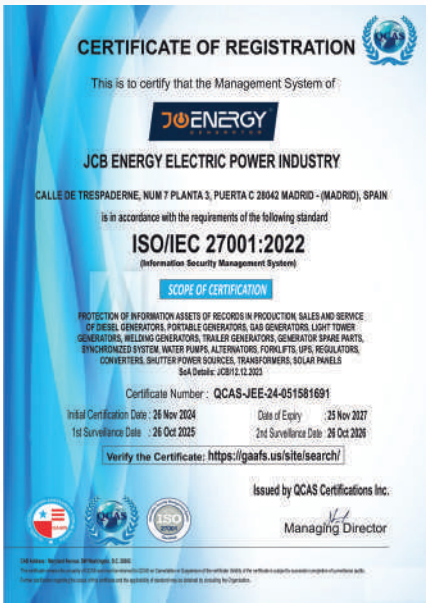

CERTIFICATE OF REGISTRATION

This is to certify that the Management System of

JCB ENERGY ELECTRIC POWER INDUSTRY

CALLE DE TRESPADERNE, NUM 7 PLANTA 3, PUERTA C 28042 MADRID - (MADRID), SPAIN

is in accordance with the requirements of the following standard

ISO/IEC 27001:2022

(Information Security Management System)

SCOPE OF CERTIFICATION

PROTECTION OF INFORMATION ASSETS OF RECORDS IN PRODUCTION, SALES AND SERVICE OF DIESEL GENERATORS, PORTABLE GENERATORS, GAS GENERATORS, LIGHT TOWER GENERATORS, WELDING GENERATORS, TRAILER GENERATORS, GENERATOR SPARE PARTS, SYNCHRONIZED SYSTEM, WATER PUMPS, ALTERNATORS, FORKLIFTS, UPS, REGULATORS, CONVERTERS, SHUTTER POWER SOURCES, TRANSFORMERS, SOLAR PANELS

SoA Details: JCB/12.12.2023

Certificate Number : QCAS-JEE-24-051581691

Initial Certification Date : 26 Nov 2024 | Date of Expiry : 25 Nov 2027

1st Surveillance Date : 26 Oct 2025 | 2nd Surveillance Date : 26 Oct 2026

Verify the Certificate: https://gaafs.us/site/search/

Issued by QCAS Certifications Inc.

Managing Director

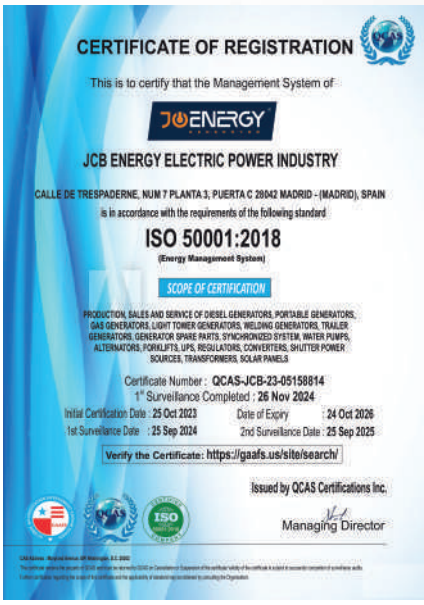

CERTIFICATE OF REGISTRATION

This is to certify that the Management System of

JCB ENERGY ELECTRIC POWER INDUSTRY

CALLE DE TRESPADERNE, NUM 7 PLANTA 3, PUERTA C 28042 MADRID - (MADRID), SPAIN

is in accordance with the requirements of the following standard

ISO 50001:2018

(Energy Management System)

SCOPE OF CERTIFICATION

PRODUCTION, SALES AND SERVICE OF DIESEL GENERATORS, PORTABLE GENERATORS, GAS GENERATORS, LIGHT TOWER GENERATORS, WELDING GENERATORS, TRAILER GENERATORS, GENERATOR SPARE PARTS, SYNCHRONIZED SYSTEM, WATER PUMPS, ALTERNATORS, FORKLIFTS, UPS, REGULATORS, CONVERTERS, SHUTTER POWER SOURCES, TRANSFORMERS, SOLAR PANELS

Certificate Number : QCAS-JCB-23-05158814

1st Surveillance Completed : 26 Nov 2024

Initial Certification Date : 25 Oct 2023 | Date of Expiry : 24 Oct 2026

1st Surveillance Date : 25 Sep 2024 | 2nd Surveillance Date : 25 Sep 2025

Verify the Certificate: https://gaafs.us/site/search/

Issued by QCAS Certifications Inc.

Managing Director

Certificate of Surveillance

This is to certify that the Quality Management System of

JCB ENERGY ELECTRIC POWER INDUSTRY

CALLE DE TRESPADERNE, NUM 7, PLANTA 3, PUERTA C, 28042 MADRID - (MADRID), SPAIN

is in accordance with the requirements of the following standard

ISO 9001:2015

(Quality Management System)

SCOPE

PRODUCTION, SALES AND SERVICE OF DIESEL GENERATORS, PORTABLE GENERATORS, GAS GENERATORS, LIGHT TOWER GENERATORS, WELDING GENERATORS, TRAILER GENERATORS, GENERATOR SPARE PARTS, SYNCHRONIZED SYSTEM, WATER PUMPS, ALTERNATORS, FORKLIFTS, UPS, REGULATORS, CONVERTERS, SHUTTER POWER SOURCES, TRANSFORMERS, SOLAR PANELS

(IAF Code: 18,19)

Certificate Number : 251023613422

1st Surveillance Completed: 26-Nov-2024

Initial Registration Date : 25-Oct-2023

1st Surveillance Date : 25-Sep-2024

2nd Surveillance Date : 25-Sep-2025

Certificate Expiry Date : 24-Oct-2026

To verify certificate, visit at :

www.arscert.com

https://uafaccreditation.org

https://www.iafcertsearch.org/

Issued by ARS Assessment Private Limited

Managing Director

UAF Address: 400, North Center Dr. STE 202, Norfolk, VA 23502, United States of America

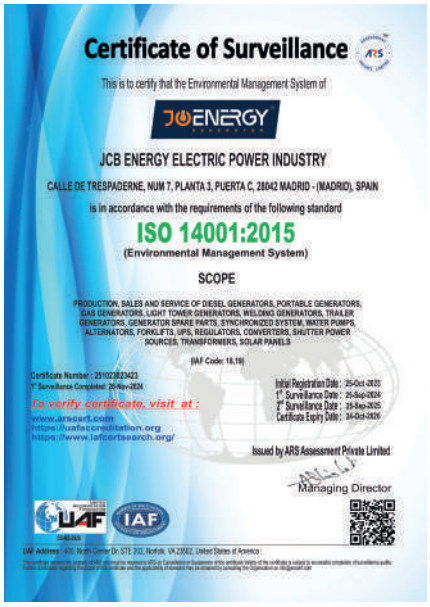

Certificate of Surveillance

This is to certify that the Environmental Management System of

JCB ENERGY ELECTRIC POWER INDUSTRY

CALLE DE TRESPADERNE, NUM 7, PLANTA 3, PUERTA C, 28042 MADRID - (MADRID), SPAIN

is in accordance with the requirements of the following standard

ISO 14001:2015

(Environmental Management System)

SCOPE

PRODUCTION, SALES AND SERVICE OF DIESEL GENERATORS, PORTABLE GENERATORS, GAS GENERATORS, LIGHT TOWER GENERATORS, WELDING GENERATORS, TRAILER GENERATORS, GENERATOR SPARE PARTS, SYNCHRONIZED SYSTEM, WATER PUMPS, ALTERNATORS, FORKLIFTS, UPS, REGULATORS, CONVERTERS, SHUTTER POWER SOURCES, TRANSFORMERS, SOLAR PANELS

(IAF Code: 18,19)

Certificate Number : 251023623423

1st Surveillance Completed: 26-Nov-2024

Initial Registration Date : 25-Oct-2023

1st Surveillance Date : 25-Sep-2024

2nd Surveillance Date : 25-Sep-2025

Certificate Expiry Date : 24-Oct-2026

To verify certificate, visit at :

www.arscert.com

https://uafaccreditation.org

https://www.iafcertsearch.org/

Issued by ARS Assessment Private Limited

Managing Director

UAF Address: 400, North Center Dr. STE 202, Norfolk, VA 23502, United States of America

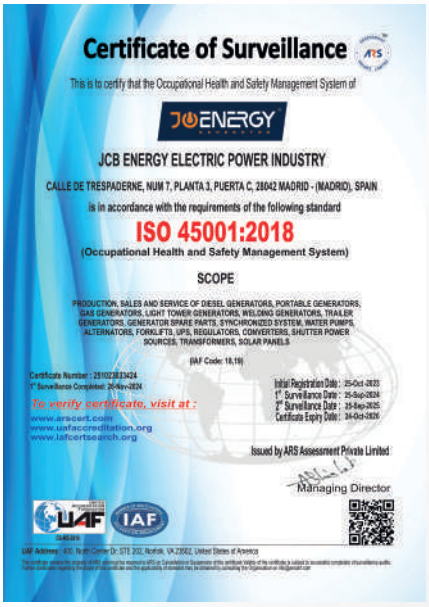

Certificate of Surveillance

This is to certify that the Occupational Health and Safety Management System of

JCB ENERGY ELECTRIC POWER INDUSTRY

CALLE DE TRESPADERNE, NUM 7, PLANTA 3, PUERTA C, 28042 MADRID - (MADRID), SPAIN

is in accordance with the requirements of the following standard

ISO 45001:2018

(Occupational Health and Safety Management System)

SCOPE

PRODUCTION, SALES AND SERVICE OF DIESEL GENERATORS, PORTABLE GENERATORS, GAS GENERATORS, LIGHT TOWER GENERATORS, WELDING GENERATORS, TRAILER GENERATORS, GENERATOR SPARE PARTS, SYNCHRONIZED SYSTEM, WATER PUMPS, ALTERNATORS, FORKLIFTS, UPS, REGULATORS, CONVERTERS, SHUTTER POWER SOURCES, TRANSFORMERS, SOLAR PANELS

(IAF Code: 18,19)

Certificate Number : 251023623424

1st Surveillance Completed: 26-Nov-2024

Initial Registration Date : 25-Oct-2023

1st Surveillance Date : 25-Sep-2024

2nd Surveillance Date : 25-Sep-2025

Certificate Expiry Date : 24-Oct-2026

To verify certificate, visit at :

www.arscert.com

www.uafaccreditation.org

www.iafcertsearch.org

Issued by ARS Assessment Private Limited

Managing Director

UAF Address: 400, North Center Dr. STE 202, Norfolk, VA 23502, United States of America

CE -VERTA-106188
-VERTA-106189

DNV

MANAGEMENT SYSTEM CERTIFICATE

Certificate no.:	Initial certification date:	Valid:
0312064	14 August 2007	14 October 2023 – 13 October 2026

This is to certify that the management system of

HD Hyundai Infracore Co., Ltd. Head Office & Incheon Plant

489, Injung-ro, Dong-gu, Incheon, 22502, Republic of Korea

and the sites as mentioned in the appendix accompanying this certificate

has been found to conform to the Environmental Management System standard:

ISO 14001:2015

This certificate is valid for the following scope:

Design, Development, Manufacture, Servicing of Internal Combustion Engine for use in Marine Industry, General Industry and Automotive Industry, and Earth Moving Equipment(Excavator, Wheel Loader, Dozer).
Testing of Earth Moving Equipment(Excavator and Wheel Loader).

Place and date:
Barendrecht, 09 October 2023

For the issuing office:
DNV - Business Assurance
Zwolseweg 1, 2994 LB Barendrecht, Netherlands

Erie Koek
Management Representative

Lack of fulfilment of conditions as set out in the Certification Agreement may render this Certificate invalid.
ACCREDITED UNIT: DNV Business Assurance B.V., Zwolseweg 1, 2994 LB, Barendrecht, Netherlands - TEL: +31(0)10282080 www.dnv.com/assurance

DNV

MANAGEMENT SYSTEM CERTIFICATE

Certificate no.:	Initial certification date:	Valid:
0312065	03 January 2008 (based on OHSAS 18001)	14 October 2023 – 13 October 2026

This is to certify that the management system of

HD Hyundai Infracore Co., Ltd. Head Office & Incheon Plant

489, Injung-ro, Dong-gu, Incheon, 22502, Republic of Korea

and the sites as mentioned in the appendix accompanying this certificate

has been found to conform to the Occupational Health and Safety Management System standard:

ISO 45001:2018

This certificate is valid for the following scope:

Design, Development, Manufacture, Servicing of Internal Combustion Engine for use in Marine Industry, General Industry and Automotive Industry, and Earth Moving Equipment(Excavator, Wheel Loader, Dozer).
Testing of Earth Moving Equipment(Excavator and Wheel Loader).

Place and date:
Barendrecht, 09 October 2023

For the issuing office:
DNV - Business Assurance
Zwolseweg 1, 2994 LB Barendrecht, Netherlands

Erie Koek
Management Representative

Lack of fulfilment of conditions as set out in the Certification Agreement may render this Certificate invalid.
ACCREDITED UNIT: DNV Business Assurance B.V., Zwolseweg 1, 2994 LB, Barendrecht, Netherlands - TEL: +31(0)10282080 www.dnv.com/assurance

Cámara de Madrid
REGISTRO GENERAL
SALIDA
Nº de Registro: 845 / RG 645
Fecha: 26/07/2024 12:00:00

IRENE SANCHEZ ROMAN, MANAGER OF THE DEPARTMENT OF LEGAL ADVISORY SERVICES AND THE DATABASE OF THE OFFICIAL CHAMBER OF COMMERCE, INDUSTRY AND SERVICES OF MADRID, WITH REGISTERED OFFICE AT PLAZA DE LA INDEPENDENCIA 1, MADRID, SPAIN

CERTIFY: That, according to the background data on record at this Chamber and others produced by the Company:

JCB ENERGY ELECTRIC POWER INDUSTRY S.L., a Company with Tax I.D. Number B13975594, and its registered office at street Trespaderne no 7, 28042 Madrid is registered on 8 May 2024, under the heading of the 1st Section, companies, of the Economic Activities Tax Tariffs Number 342 to perform the following activity:

- Manufacture of electrical material for use and equipment

In witness whereof, for the appropriate purpose, I have issued and signed this Certificate, to which I affix the stamp of this Chamber, in Madrid on 26 July 2024.

Cámara de Madrid
REGISTRO GENERAL
SALIDA
Nº de Registro: 859 / RG 659
Fecha: 30/07/2024 12:07:28

IRENE SANCHEZ ROMAN, DIRECTORA DEL DEPARTAMENTO DE ASESORIA JURIDICA Y CENSO DE LA CÁMARA OFICIAL DE COMERCIO, INDUSTRIA Y SERVICIOS DE MADRID, CON DOMICILIO SOCIAL EN LA PLAZA DE LA INDEPENDENCIA Nº 1, MADRID – ESPAÑA

CERTIFICA: Que de los antecedentes que obran en esta Corporación y de otros exhibidos por la sociedad, resulta:

NUMERO - Que la compañía JCB ENERGY ELECTRIC POWER INDUSTRY S.L., es una sociedad mercantil de nacionalidad española, constituida mediante escritura pública de fecha 23 de junio de 2023, autorizada por don José María Marín Vázquez, Notario del Ilustre Colegio de Madrid con el número 1.251 de orden de su protocolo, e inscrita en el Registro Mercantil al Tomo 46.424, Folio 40, Hoja M-799.035, Inscripción 1ª.

SEGUNDO - Que según se desprende de la mencionada escritura de constitución, en el artículo 2 de los Estatutos de la compañía JCB ENERGY ELECTRIC POWER INDUSTRY S.L., consta que tiene por objeto social:

"Actividad principal 27.11. Fabricación de motores, generadores y transformadores eléctricos".

TERCERO - Que según se desprende de la escritura de constitución, el capital social de la compañía JCB ENERGY ELECTRIC POWER INDUSTRY S.L., se fija en la cantidad de 19.600,00 € (DIECINUEVE MIL NOVECIENTOS VEINTE EUROS), dividido en 19.920 participaciones sociales, de 1,00 € (UN EURO) de valor nominal cada una, numeradas correlativamente del 1 al 19.920 ambos inclusive, que son íntegramente asumidas y desembolsadas por el socio fundador.

CUARTO - Que según consta en la escritura de constitución citada en párrafos anteriores, la compañía JCB ENERGY ELECTRIC POWER INDUSTRY S.L., opta por el sistema de Administrador Único y nombra por tiempo indefinido a don Mohamed A M Elaalem, con Número de Identidad Extranjero Y6048327P, para que actúe en nombre y representación de la mercantil, con cuantas facultades legal y estatutariamente corresponden a dicho cargo, procediendo el administrador nombrado a la aceptación del mismo.

QUINTO - Que la compañía JCB ENERGY ELECTRIC POWER INDUSTRY S.L., con domicilio en calle Trespaderne número 7, 28042 Madrid y provista de Número de Identificación Fiscal B13975594, consta dada de alta en el grupo/epígrafe 342 de la Sección 1ª empresarial de las Tarifas del Impuesto sobre Actividades Económicas, que faculta para ejercer la actividad "Fabricación de material eléctrico de utilización y equipamiento".

Vertacert International

CE

CE DECLARATION OF CONFORMITY

JCB ENERGY ELECTRIC POWER INDUSTRY SL
C/ ALFREDO MARQUERIE, NUMERO 11, PUERTA A, PLANTA 7 MADRID 28034 MADRID

Description Of The Product : GENERATOS AND PUMPS

Product Brand/Model/Type : DIESEL GENERATORS, GAS GENERATORS, PORTABLE GENERATORS, LIGHT TOWERS, WATER PUMPS, FORKLIFT, UPS, REGULATORS, CONVERTERS, ALTERNATORS, WELDING GENERATORS, TRAILER GENERATORS, SHUTTER POWER SOURCES

Applicable Harmonised Standards : EN ISO 12100:2010,EN ISO 8528-12:2014,EN60204:2006+A1:2009,EN 60204-1:2018, EN ISO 14120:2015,EN ISO 13857:2019,EN ISO 8528-4:2005,EN 61000-6-2:2005

Applicable EC Directives : 2006/42/EC MACHINERY DIRECTIVE
: 2014/30/EU ELECTROMAGNETIC COMPABILITY DIRECTIVE

Type /Models : JCB SERIES, JCD SERIES, JCD SERIES, JCC SERIES, JNP SERIES, JGD SERIES, JNC SERIES, JPG SERIES, JPD SERIES, JLT SERIES, JBW SERIES, JEP SERIES, JHP SERIES, JFC SERIES, JFC SERIES, JCG SERIES, JNP SERIES.

Certificate Number : VERTA-106188
Certificate Issue Date : 04.02.2025
Certificate Validity Date : 04.02.2026
Certificate Period : 1 Year

INAS

www.vertacert.com - info@vertacert.com

Vertacert International

CE

CE DECLARATION OF CONFORMITY

JCB ENERGY ELECTRIC POWER INDUSTRY SL
C/ ALFREDO MARQUERIE, NUMERO 11, PUERTA A, PLANTA 7 MADRID 28034 MADRID

Description Of The Product : POWER GENERATORS
Ürünün Tanımı : GÜÇ JENERATÖRLERİ

Applicable Harmonised Standards : TSE E 195, TS ISO 8528-8, TS EN ISO 3744:2008
Geçerli Uyumlaştırılmış Standartlar

Applicable EC Directives : MDMD REGULATION AND MDDR DIRECTIVE (2005/32/EC, MDMD DIRECTIVE (2006/14/EC)
Geçerli AT Direktifleri : GÜRÜLTÜ YÖNETMELİĞİ VE GÜRÜLTÜ DIRECTIVE (2005/88/EC, GÜRÜLTÜ DIRECTIVE (2000/14/AT)

Sertifika Numarası / Certificate Number : VERTA-106189
İlk Yayın Tarihi / Certificate Issue Date : 04.02.2025
Sertifika Geçerlilik Tarihi / Certificate Validity Date : 04.02.2026
Sertifika Periyodu / Certificate Period : 1 YEAR / 1 Year

INAS

www.vertacert.com - info@vertacert.com

CE -VERTA-106188
-VERTA-106189

JCENERGY
GENERATOR
JCENERGY
SCAN ME
www.jcbenergy.com
CE -VERTA-106188
-VERTA-106189