

JCB ENERGY ELECTRIC POWER INDUSTRY

📍 MADRID / SPAIN



BENZİNLİ SU NASOSU -- JBP SERİYASI







QRUP		JBP 15	JBP 15H	JBP 20	JBP 30	JBP 40
Nasos						
Giriş-Çıxış Çapı	(mm-inc)	40-1,5"	40-1,5"	50-2"	80-3"	100-4"
Maks. Basma Yüksəkliyi	(mss)	22	60	26	30	26
Sorma Dərinliyi	(m)	8	8	8	8	8
Maksimum axın	(m ³ /h)	12	18	36	60	96
İlk Suyu Alma Zamanı	(4 mt/sn)	120	180	80	120	180
Mühərrik						
Model		JBE 152 F	JBE 168 F-2	JBE 168 F	JBE 168 F-2	JBE 177 F
Tip		Hava Soğutmalı- 4 Zamanlı- OHV 25°- Tek Silindirli				
Bore x Stroke	(mm)	52 X 46	68 x 54	68 x 54	68 x 54	77 x 58
Silindr Həcmi	(cm ³)	97,7	196	163	196	270
Sıxılma nisbəti		5,6:1	8,5:1	8,5:1	8,5:1	8,2:1
Maks. Çıxış gücü	d/dk	2,5 HP /3600	6,5 HP /3600	5,5 HP /3600	6,5 HP /3600	9 HP /3600
İş rejimi		İpli	İpli	İpli	İpli	İpli
Hava filtri		Quru Tip	Quru Tip	Quru Tip	Quru Tip	Quru Tip
Yanacaq çəninin tutumu	(lt)	3.5	3.6	3.6	3.6	6
Yanacaq sərfi	(g/Kw-saat)	450	395	395	395	374
Davamlı İş Vaxtı	(saat)	0.35	0.6	0.6	0.6	1.1
Yağ tutumu	(lt)	2.5	-	2,5	2	2
Yağ Xəbərdarlığı		√	√	√	√	√
Səs Səviyyəsi (dBA @ 7mt.)		63	70	66	70	80
Ölçülər						
Uzunluq	(mm)	340	500	445	445	670
Genişlik	(mm)	298	370	345	345	440
Yüksəklik	(mm)	380	460	360	360	540
Boş Ağırlıq/ Boş Çəki	(kg)	12	32	28	32	50







-VERTA-106188
-VERTA-106189

QRUP		JBP 50-60A	JBP 50-100	JBP 50-100L
Giriş-Çıxış	inch	2	2' 2'+2*1.5'	2
Basma Yüksəkliyi	m	60	80	100
Sorma Dərinliyi	m	/	7	7
Axın	m ³ /saat	22	16	30
Yanacaq Çəninin Tutumu	L	3,6	3,6	6.3
Yanacaq Sərfiyyatı Dərəcəsi	g/kW.saat	≤395	≤395	≤370/374
Xalis Çəki	kg	30	25.5	75
Ölçülər	mm	530*400*410	540*440*440	650*560*540
Mühərrik		JC170F/P	JC170F/P	JC190F/P/188F/P
Silindir Həcmi	ml	212	212	420/390
Yağ tutumu	l	0.6	0.6	6.3
Yükləmə/20GP/40GP/40HQ		300/620/744	265/540/648	136/284/284

SERTİFİKATLARIMIZ

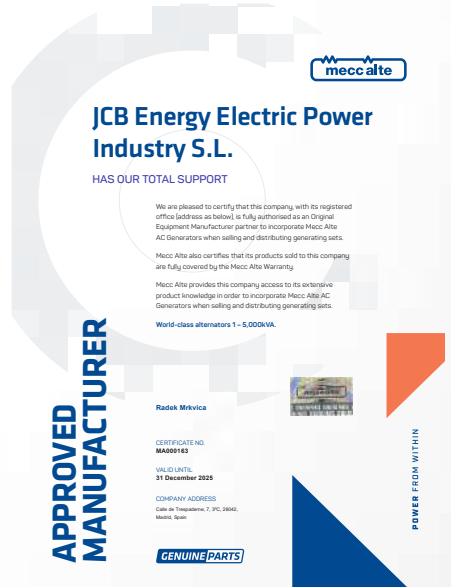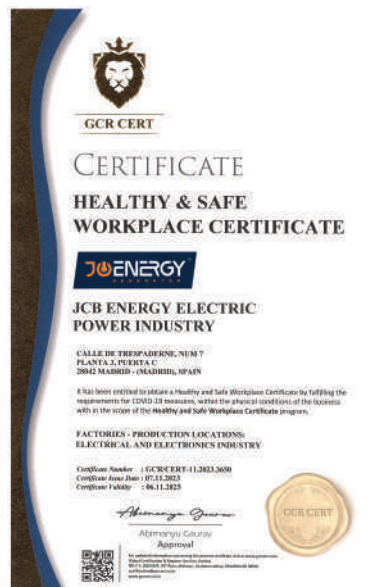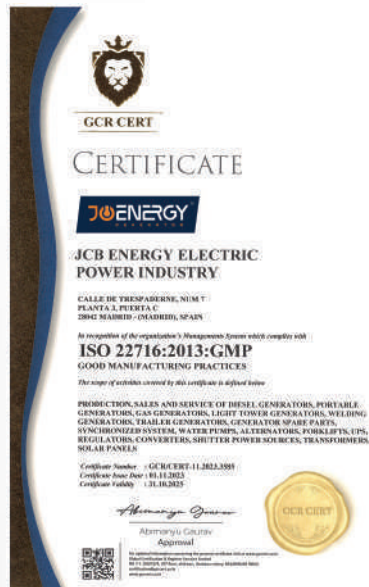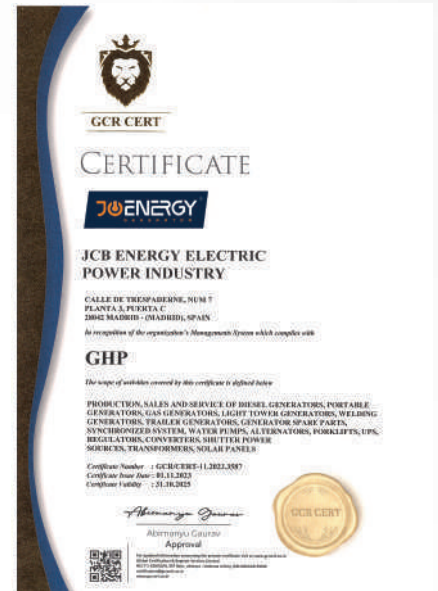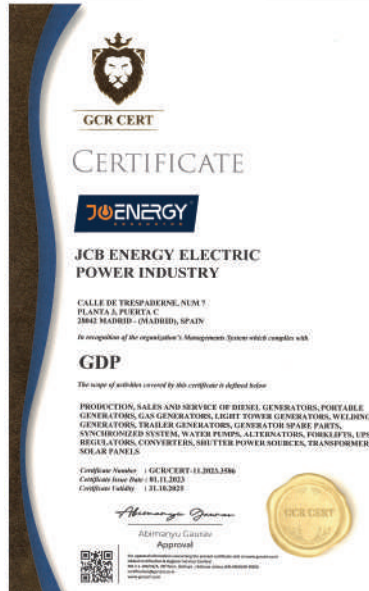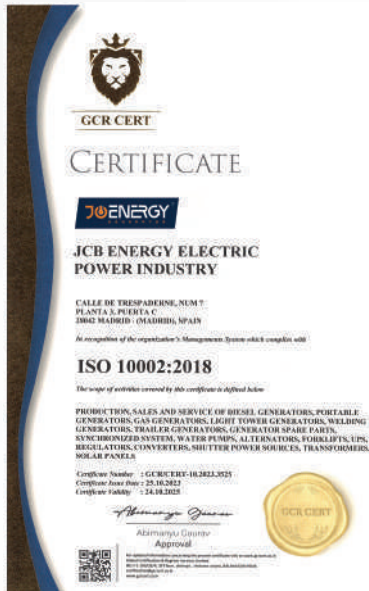

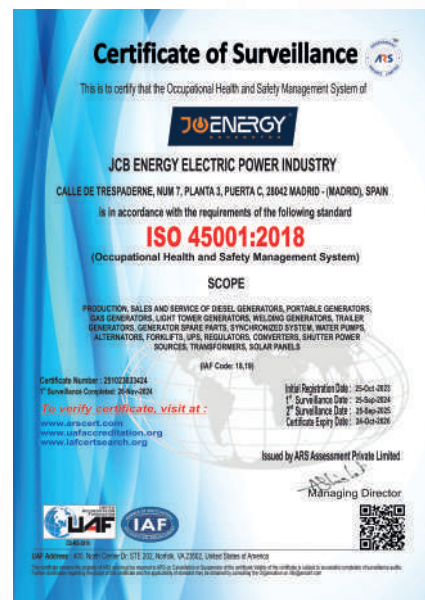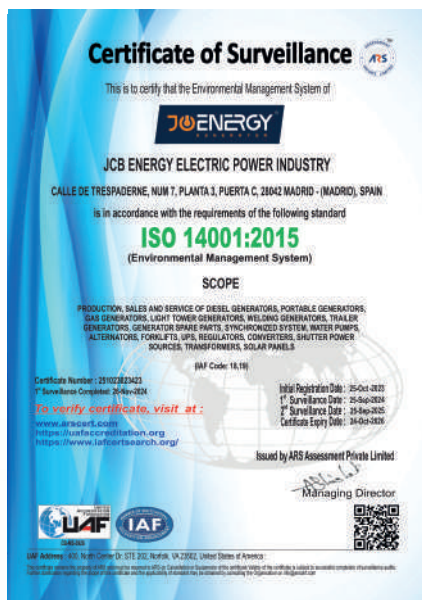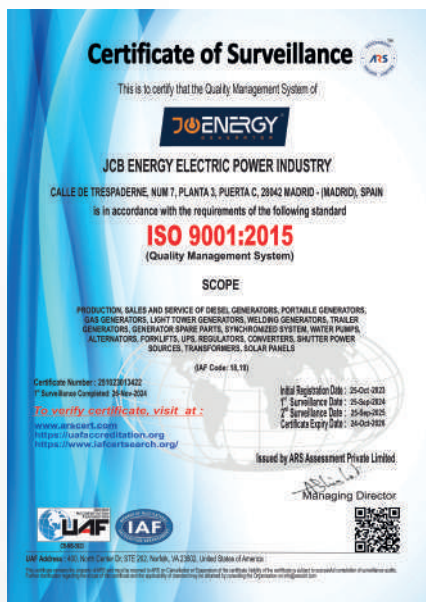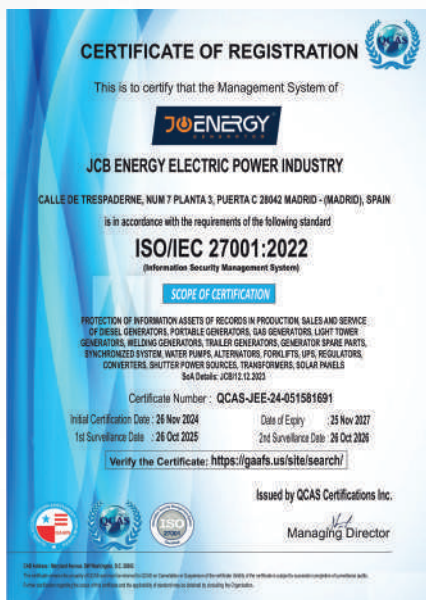

JCBENERGY
GENERATOR



CE -VERTA-106188
-VERTA-106189

www.jcbenergy.com